



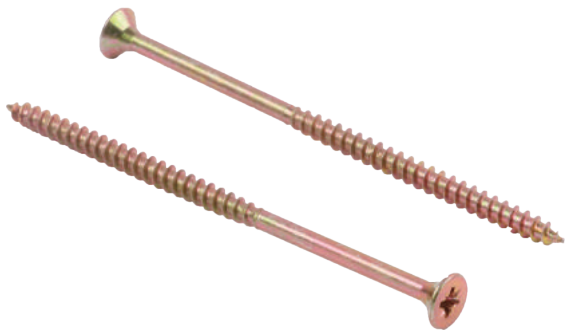

CHIPBOARD SCREW

Tolerance		DK		D		D1	
Size	M2.5-P1.1	4.60	4.90	2.30	2.45	1.50	1.70
	M3.0-P1.35	5.50	6.00	2.75	3.00	1.70	2.00
	M3.5-P1.6	6.50	7.00	3.20	3.50	1.90	2.20
	M4.0-P1.8	7.50	8.00	3.70	4.00	2.20	2.50
	M4.5-P2.0	8.50	9.00	4.20	4.50	2.40	2.70
	M5.0-P2.2	9.50	10.00	4.70	5.00	2.80	3.10
	M6.0-P2.6	11.50	12.00	5.70	6.00	3.50	3.80

Tolerance		L1		L
Size	M 7-3.0x 38 ~ 50	8.00	9.00	± 1.00
	M 7-3.0x 60	8.00	9.00	± 1.20
	M 7-3.0x 70	13.00	14.00	± 1.20

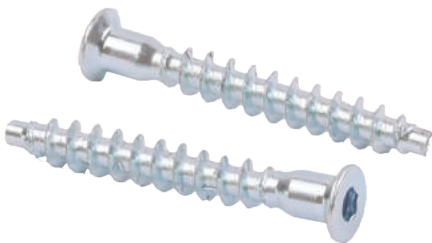

CONFIRMAT SCREW



DRYWALL SCREW

Tolerance		DK		D		R	
Size	# 6-9 (M3.5)	8.00	8.50	3.60	3.90	4.00	5.00
	# 7-9 (M3.9)	8.00	8.50	3.90	4.30	4.00	5.00
	# 8-9 (M4.2)	8.00	8.50	4.30	4.60	4.00	5.00
	#10-8 (M4.8)	8.50	9.00	5.00	5.30	4.00	5.00

Tolerance	
Size	M6.0x L
	M6.1x L
	M6.3x L
	M6.6x L



EURO SCREW




MACHINE SCREW

Tolerance		L
Size	M 6-1.0x 13 ~ 19	± 0.35
	M 6-1.0x 20 ~ 30	± 0.42
	M 6-1.0x 31 ~ 50	± 0.50
	M 6-1.0x 51 ~ 80	± 0.70

Tolerance		DK		H	
Size	# 5	5.87	6.22	2.16	2.41
	# 6	6.05	6.50	2.36	2.61
	# 8	6.86	7.77	2.79	3.04
	#10	8.18	9.47	3.20	3.48
	#12	10.34	10.79	3.58	3.88



SELF TAPPING SCREW

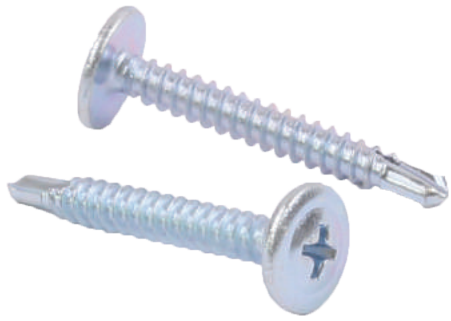

SELF DRILLING SCREW

Tolerance		DK		S		S1	H		U	
Size	# 6-20	7.68	8.33	6.20	6.35	6.91	2.04	2.36	0.39	0.63
	#8-18	8.18	8.83	6.20	6.35	6.91	2.44	2.79	0.49	0.78
	#10-16	9.76	10.51	7.75	7.92	8.64	2.67	3.04	0.49	0.78
	#12-14	10.11	10.9	7.75	7.92	8.64	3.54	3.93	0.56	0.99
	#14-14	12.20	13.20	9.33	9.52	10.39	4.37	4.82	0.76	1.27
Tolerance		D		D1		T		K		
Size	# 6-20	3.43	3.53	2.52	2.64	2.70	2.90	3.80	4.30	
	#8-18	4.09	4.21	2.95	3.09	3.30	3.50	4.80	5.30	
	#10-16	4.65	4.80	3.43	3.58	3.80	4.00	5.50	6.00	
	#12-14	5.31	5.46	3.99	4.16	4.40	4.60	7.50	8.00	
	#14-14	6.10	6.24	4.70	4.78	5.40	5.60	8.50	9.00	

Tolerance		S		H		L1		D	
Size	1/4-10	10.80	11.13	3.81	4.78	6.02	6.60	6.02	6.60
	5/16-9	12.29	12.70	4.95	5.97	7.57	8.23	7.57	8.23
	3/8-7	13.82	14.27	5.74	6.81	9.15	9.85	9.15	9.85
	1/2-6	18.42	19.05	7.68	9.24	12.25	13.08	12.25	13.08
	5/8-5	23.02	23.82	9.61	11.27	15.37	16.30	15.37	16.30
	3/4-4-1/2	27.64	28.57	11.55	13.31	18.52	19.50	18.52	19.50



HEX HEAD SCREW



HEX SOCKET CAP SCREW

Tolerance		S		H		L1		D	
Size	1/4-10	10.80	11.13	3.81	4.78	6.02	6.60	6.02	6.60
	5/16-9	12.29	12.70	4.95	5.97	7.57	8.23	7.57	8.23
	3/8-7	13.82	14.27	5.74	6.81	9.15	9.85	9.15	9.85
	1/2-6	18.42	19.05	7.68	9.24	12.25	13.08	12.25	13.08
	5/8-5	23.02	23.82	9.61	11.27	15.37	16.30	15.37	16.30
	3/4-4-1/2	27.64	28.57	11.55	13.31	18.52	19.50	18.52	19.50

Tolerance		L
Size	M 6-2.6x 75	± 0.50
	M 6-2.6x100	± 0.50



JOINT SCREW



GENIUS GLOBAL
MATERIAL CO., LTD.

🏠 GENIUS GLOBAL MATERIAL CO., LTD.

☎ +886-7-6234143

📠 +886-7-6216217

✉ Lee.geniustw.henry@gmail.com

📍 No.22, Lane 95, Huayuan Rd.
, Kaohsiung City, Taiwan R.O.C

